

# Document made available under the Patent Cooperation Treaty (PCT)

International application number: PCT/GB05/000500

International filing date: 10 February 2005 (10.02.2005)

Document type: Certified copy of priority document

Document details: Country/Office: GB  
Number: 0404194.3  
Filing date: 25 February 2004 (25.02.2004)

Date of receipt at the International Bureau: 07 April 2005 (07.04.2005)

Remark: Priority document submitted or transmitted to the International Bureau in compliance with Rule 17.1(a) or (b)



World Intellectual Property Organization (WIPO) - Geneva, Switzerland  
Organisation Mondiale de la Propriété Intellectuelle (OMPI) - Genève, Suisse



PCT/GB 2005 / 0 0 0 5 0 0



INVESTOR IN PEOPLE

The Patent Office  
Concept House  
Cardiff Road  
Newport  
South Wales  
NP10 8QQ

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.


In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

Signed

Dated 17 March 2005

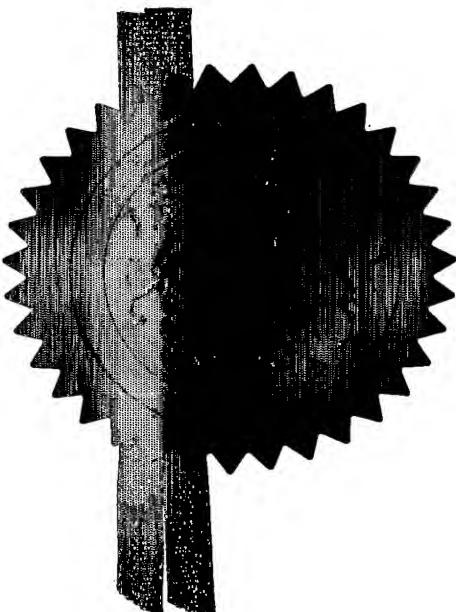




The  
Patent  
Office26 FEB 04 E876138-4 D01038  
P01/7700 0.00-0404194.3 CHEQUE

## Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

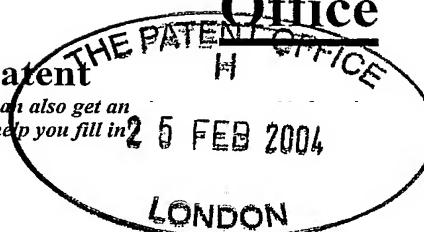

The Patent Office

Cardiff Road  
Newport  
South Wales  
NP10 8QQ

1. Your reference

P104247GB/MPG/51658

2. Patent application number

(The Patent Office will fill in this part)

0404194.3

25 FEB 2004

3. Full name, address and postcode of the or of each applicant (*underline all surnames*)

TTPCom Limited  
Melbourn Science Park  
Cambridge Road  
Melbourn  
Royston  
Hertfordshire  
SG8 6HQ

Patents ADP number (*if you know it*)

3262198002

If the applicant is a corporate body, give the country/state of its incorporation

United Kingdom

4. Title of the invention

Wireless Communication Device and Method of Operating the same

5. Name of your agent (*if you have one*)"Address for service" in the United Kingdom to which all correspondence should be sent (*including the postcode*)

WITHERS & ROGERS  
Goldings House  
2 Hays Lane  
London  
SE1 2HW

Patents ADP number (*if you know it*)

1776001 ✓

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or each of these earlier applications and (*if you know it*) the or each application number

Country	Priority application number ( <i>if you know it</i> )	Date of filing ( <i>day / month / year</i> )
---------	--	---

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application


Number of earlier application

Date of filing  
(*day / month / year*)8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (*Answer 'Yes' if:*

- a) any applicant named in part 3 is not an inventor, or
- b) there is an inventor who is not named as an applicant, or
- c) any named applicant is a corporate body.

*See note (d)*

YES



9. Enter the number of sheets for any of the following items you are filing with this form.  
Do not count copies of the same document

Continuation sheets of this form

Description	5	✓
Claim(s)	1	✓
Abstract	1	✓
Drawing (s)	3	+ 3

*JWL*

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (Patents Form 7/77)

Request for preliminary examination and search (Patents Form 9/77)

Request for substantive examination (Patents Form 10/77)

Any other documents  
(please specify)

11.

I/We request the grant of a patent on the basis of this application.

Signature *Matthew Gillard*

Date 24 February 2004

12. Name and daytime telephone number of person to contact in the United Kingdom

Matthew P Gillard

0117 925 3030

#### Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least six weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

#### Notes

- a) If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500 505.
- b) Write your answers in capital letters using black ink or you may type them.
- c) If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- d) If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- e) Once you have filled in the form you must remember to sign and date it.
- f) For details of the fee and ways to pay please contact the Patent Office.



**WIRELESS COMMUNICATION DEVICE AND METHOD OF  
OPERATING THE SAME**

The invention relates to the field of wireless communications. For example, the invention is applicable to the field of mobile telephony.

Technical specifications will differ from one wireless communications network to another. This leads to the problem that a wireless communications device designed to work in one network is unlikely to be compatible with other networks. One approach to ameliorating the compatibility issue is to provide a standard operating scheme for adoption by designers and manufacturers of wireless communications networks. For example, standards such as GSM, AMPS, CDMAOne and UMTS exist in the mobile telephony field. In fact, the mobile telephony field illustrates the situation where several incompatible standards coexist with the result that the compatibility problem, although reduced, is not eliminated. For example, a mobile telephone designed according to the AMPS standard will not work in a GSM network.

In practice, wireless communications networks do not have perfect coverage, i.e. there will be places where a user will find it difficult or impossible to connect to his or her wireless communications network. Even if another network provides adequate coverage to the user's location, the user's device may be incompatible with the other network, as discussed above.

One object of the present invention is to improve the chances of a user being able to connect to a wireless communications network.

According to one aspect, the invention provides a wireless communications network participant comprising: a plurality of communications subsystems, each subsystem being arranged to transmit and/or receive signals under a different telecommunications standard; means for generating a clock signal; and scheduling means for sending commands to at least one of the subsystems for its or their operation, the scheduling means deducing the

timing of the commands relative to the clock signal. Typically, these commands cause the subsystem(s) to begin, modify or stop performing certain processes.

Thus, the invention provides a system which can operate under several standards, thereby facilitating connection by a user to a number of wireless communications networks, with the result that the chances of a wireless communications device being used successfully are enhanced.

Furthermore, the invention advantageously permits a single timing signal within the wireless communications network participant to be used for interacting with networks organised according to different standards so that separate timing signals do not need to be generated for use with different standards. Moreover, where the wireless communications network participant switches from interacting with a network organised according to one standard to interacting with a network organised according to another standard, the use of a single timing signal allows the switchover to be implemented efficiently as the timings required under the different standards are reckoned relative to the same clock signal.

In one embodiment, the process of determining how the timing of operations of the wireless communications network participant should be controlled relative to the timing signal in order to permit the participant to interact with a target unit involves producing an offset indicating a timing offset between a point in the timing signal and a corresponding point in a notional timing signal formatted for communicating between the participant and the target unit.

The wireless communications network participant may be, for example, a mobile telephone. The target units interacting with the wireless communications device may be, for example, basestations in a mobile telephony network. Two of the standards used by the subsystems may be, for example, the UMTS and GSM standards.

By way of example only, certain embodiments of the invention will now be described with reference to the accompanying figures, in which:

Figure 1 shows, schematically, a dual band mobile telephone interacting with a GSM network and a UMTS network;

Figure 2 is a timing diagram illustrating the operation of the mobile telephone of Figure 1; and

Figure 3 shows, schematically, a modified version of the telephone of Figure 1.

Figure 1 shows a mobile telephone 10 which is capable of interacting with basestations, such as 11 and 13, in a mobile telephone network 12 organised according to the UMTS standard and in a mobile telephone network 14 organised according to the GSM standard. The structure of the mobile telephone 10 is not shown in detail in Figure 1 which schematically illustrates only the processes within the telephone that contribute towards the invention.

As shown in Figure 1, the mobile telephone 10 comprises a GSM subsystem 16 for performing the processing operations that are necessary when communicating with a GSM network, such as network 14. The mobile telephone 10 also comprises a UMTS subsystem 18 for performing the processing operations that are necessary when communicating with a UMTS network, such as network 12. Each of the processing subsystems 16 and 18 is configured to generate signals for transmission from an antenna 20 of the telephone 10 and also to process signals received by the telephone 10 through the antenna 20. The subsystems 16 and 18 share some of the hardware of the telephone 10, including a clock 24.

The scheduling and timing of tasks performed by the processing subsystems 16 and 18 are controlled, ultimately, by a clock signal 23 provided by the clock 24. Clock 24 contains a crystal oscillator for the purpose of generating the clock signal 23. The crystal oscillator is arranged such that the clock signal 23 is at the frequency required by the UMTS subsystem 18 to perform UMTS tasks. Thus, when the telephone 10 is communicating with a UMTS basestation, the UMTS subsystem 18 times and schedules UMTS tasks by using the clock signal 23 directly.

The clock signal 23 conforms to the UMTS standard so it cannot be used directly in the control of GSM operation of the mobile telephone 10 because the GSM standard demands a clock signal at a different frequency. To allow GSM tasks to be performed with the correct timing, the telephone 10 contains a scheduler 22 that interacts with the clock signal 23. The scheduler 22 uses the clock signal 23 as a reference signal to calculate the moments when certain actions must be begun or stopped by the GSM subsystem 16. Based on the calculated event timings, the scheduler can send commands to the GSM subsystem 16 to cause GSM tasks to be carried out at the correct times. Thus, the GSM tasks are not controlled directly by a master clock signal but on the contrary the GSM subsystem 16 receives commands to perform the required GSM tasks at the correct times.

The operation of the subsystems 16 and 18 and the scheduler will now be described with reference to Figure 2.

Figure 2 illustrates the clock signal 23 extending forward in time from an arbitrary origin  $t_0$ . Figure 2 illustrates a situation where the mobile telephone 10 can acquire signals from four basestations in its vicinity. Two of these basestations form part of a UMTS network and are labelled UMTS#1 and UMTS#2. The other two of these basestations form part of a GSM network and are labelled GSM#1 and GSM#2.

For the purposes of this example, it is assumed that the mobile telephone 10 is initially operating in the UMTS mode and that it first establishes a link to UMTS#2. The UMTS core 18 determines that the boundary of the frame structure of the signals from basestation UMTS#2 occurs at time  $t_3$ . Therefore, the UMTS subsystem 18 records offset C indicating the position of  $t_3$  relative to  $t_0$  so that the UMTS subsystem 18 has a record of the frame structure of the signals of basestation UMTS#2. At some subsequent time, if the mobile telephone is required to interact with basestation UMTS#2, the appropriate UMTS task can be scheduled to commence at the appropriate time by taking offset C into account. In a similar way, the UMTS subsystem 18 can acquire signals from basestation UMTS#1 and determine an offset A indicating the position  $t_1$  of the boundary of the frame structure of the signals from the basestation UMTS#1 relative to the arbitrary origin  $t_0$  of clock signal 23. Likewise, the GSM subsystem 16 can acquire signals from basestations GSM#1 and

GSM#2 and process them under commands from the scheduler 22 to determine offsets B and D indicating the boundaries  $t_2$  and  $t_4$  of the frame structures of the signals from GSM#1 and GSM#2 respectively relative to the arbitrary origin  $t_0$  of the clock signal 23.

When linked to basestation UMTS#2, the telephone 10 will monitor the other basestations UMTS#1, GSM#1 and GSM#2 in the vicinity. Primarily, this monitoring is done to determine whether better communications can be achieved (e.g. with fewer errors) by using a communications link to a different basestation.

Figure 3 shows a modified version 10a of the telephone of Figure 1. In Figure 3, the clock signal is abstracted from the telecommunications standards used by the subsystems 16 and 18 and a modified scheduler 22a uses the clock signal to deduce event timings for controlling both the UMTS subsystem 18 and the GSM subsystem 16. The clock signal 23 must be of sufficiently high frequency so that it can accurately time its issuing of commands to the UMTS and GSM subsystems within the timing error tolerances of those standards. In this example, the clock 24 produces a signal at 19.2 MHz, which simplifies the calculation of event times by the scheduler 22a because it is 5 times the UMTS chip rate and 86 times the 200 kHz radio channel spacing used in GSM.

CLAIMS

1. A wireless communications network participant comprising:
  - a plurality of communications subsystems, each subsystem being arranged to transmit and/or receive signals under a different telecommunications standard;
  - means for generating a clock signal; and
  - scheduling means for sending commands to at least one of the subsystems for its or their operation, the scheduling means deducing the timing of the commands relative to the clock signal.
2. A participant according to claim 1, wherein several subsystems each receive commands from the scheduler on the basis of the clock signal.
3. A participant according to claim 1, wherein the clock signal is matched to at least one of the subsystems and the or each matched subsystem is arranged to utilise the clock signal without the intermediary of the scheduling means.
4. A participant according to claim 1, 2 or 3, wherein one of said subsystems is a GSM subsystem and another is a UMTS subsystem.
5. A participant for a wireless communications network, the participant being substantially as hereinbefore described with reference to Figures 1 and 2 or to Figures 2 and 3.

**ABSTRACT****WIRELESS COMMUNICATION DEVICE AND METHOD OF  
OPERATING THE SAME**

A wireless communications network participant comprising: a plurality of communications subsystems, each subsystem being arranged to transmit and/or receive signals under a different telecommunications standard; means for generating a clock signal; and scheduling means for sending commands to at least one of the subsystems for its or their operation, the scheduling means deducing the timing of the commands relative to the clock signal.

(Figure 3)



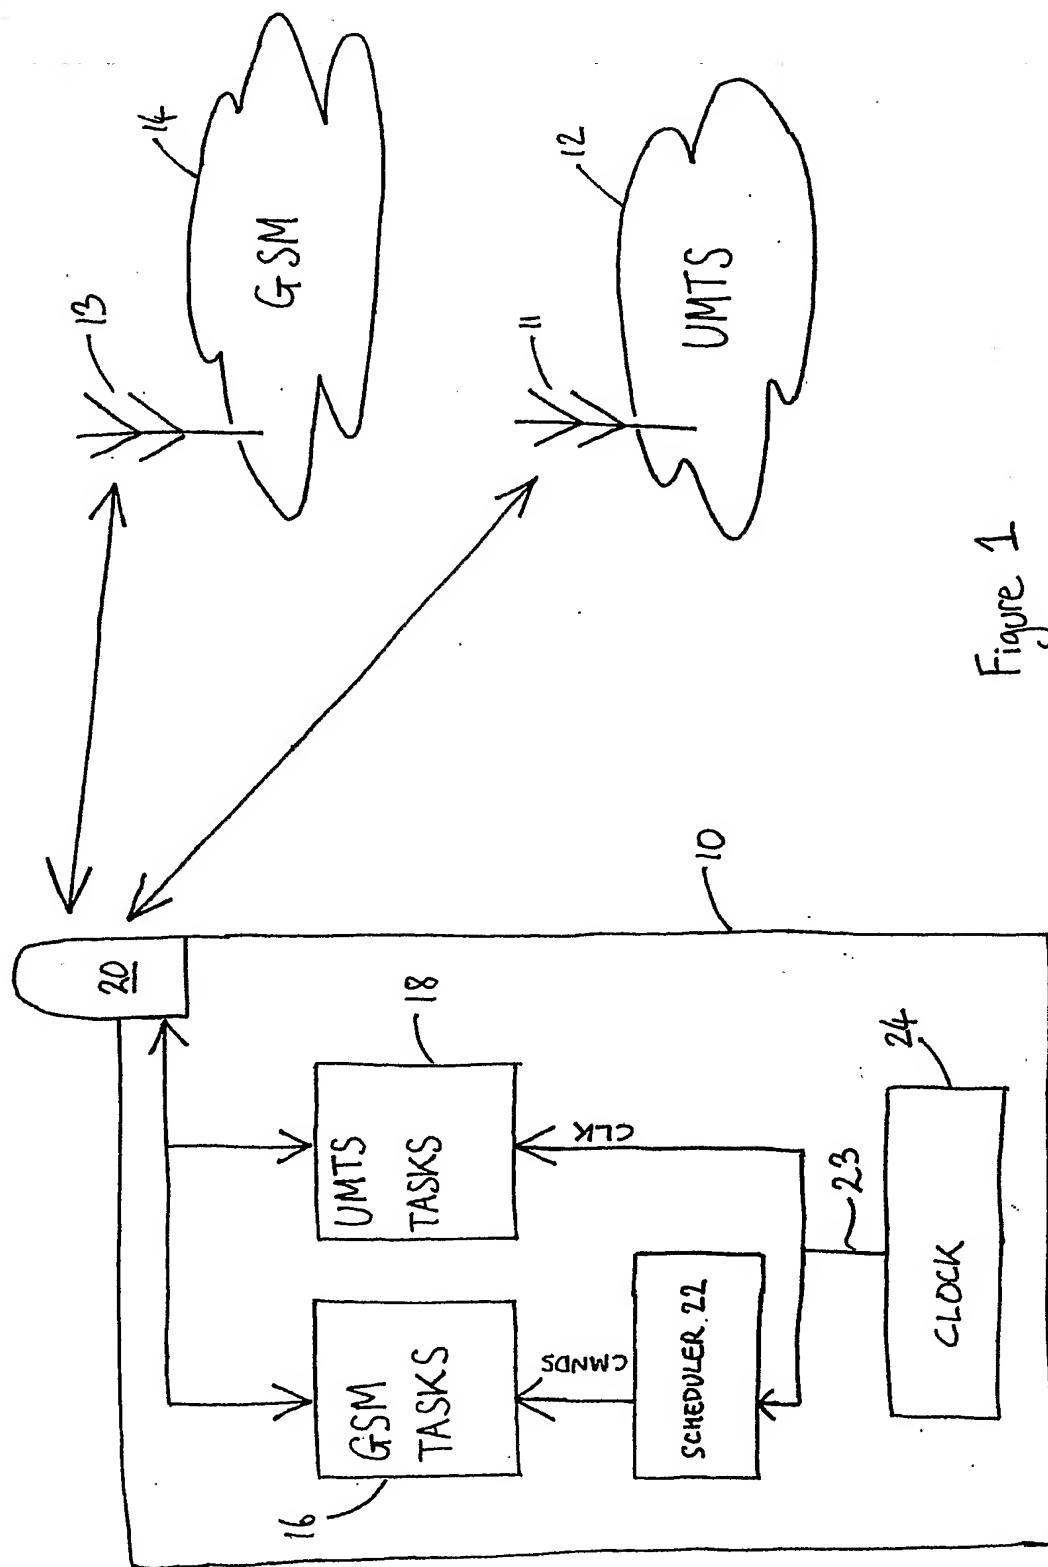


Figure 1



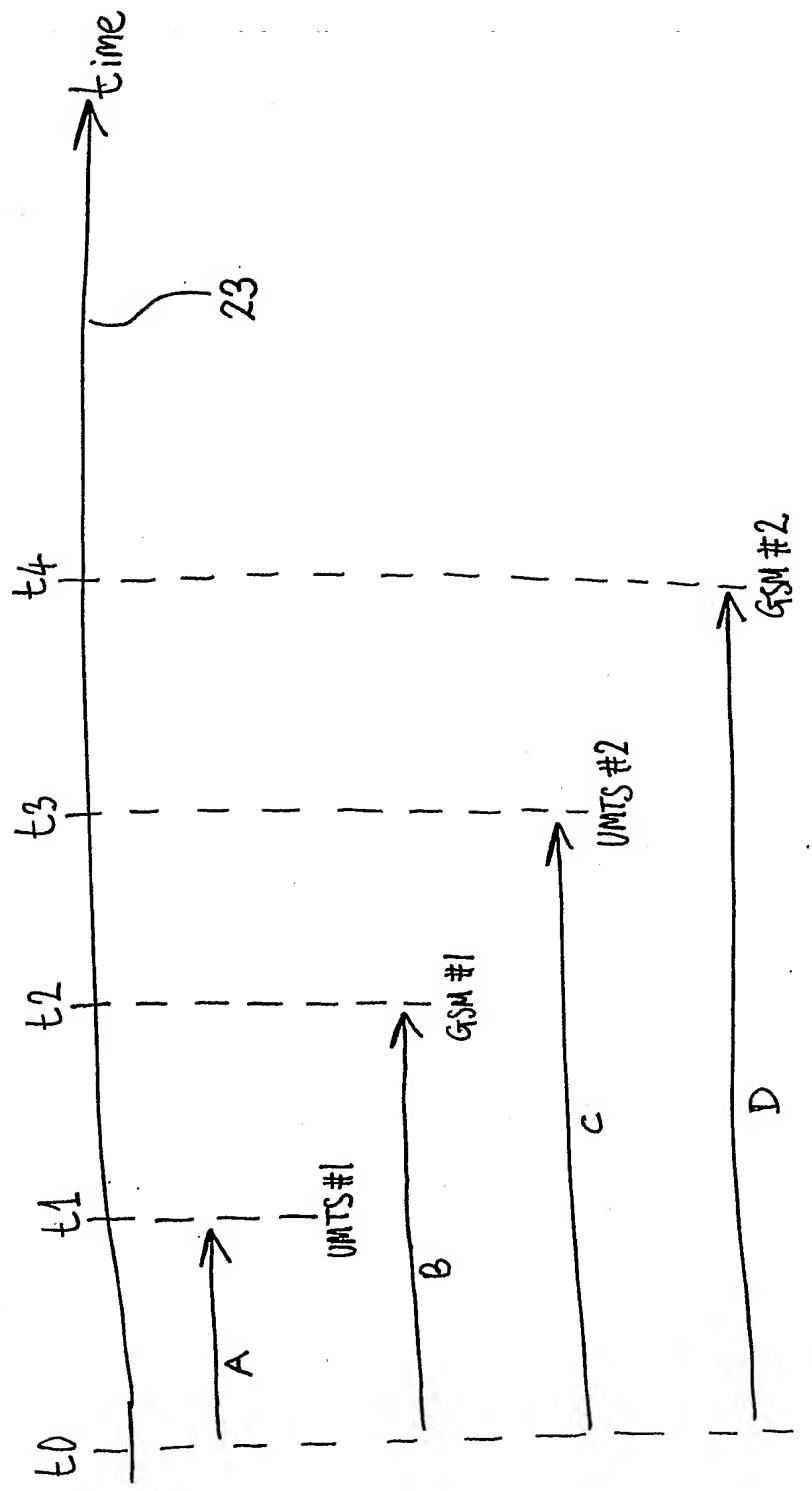


Figure 2



3/3

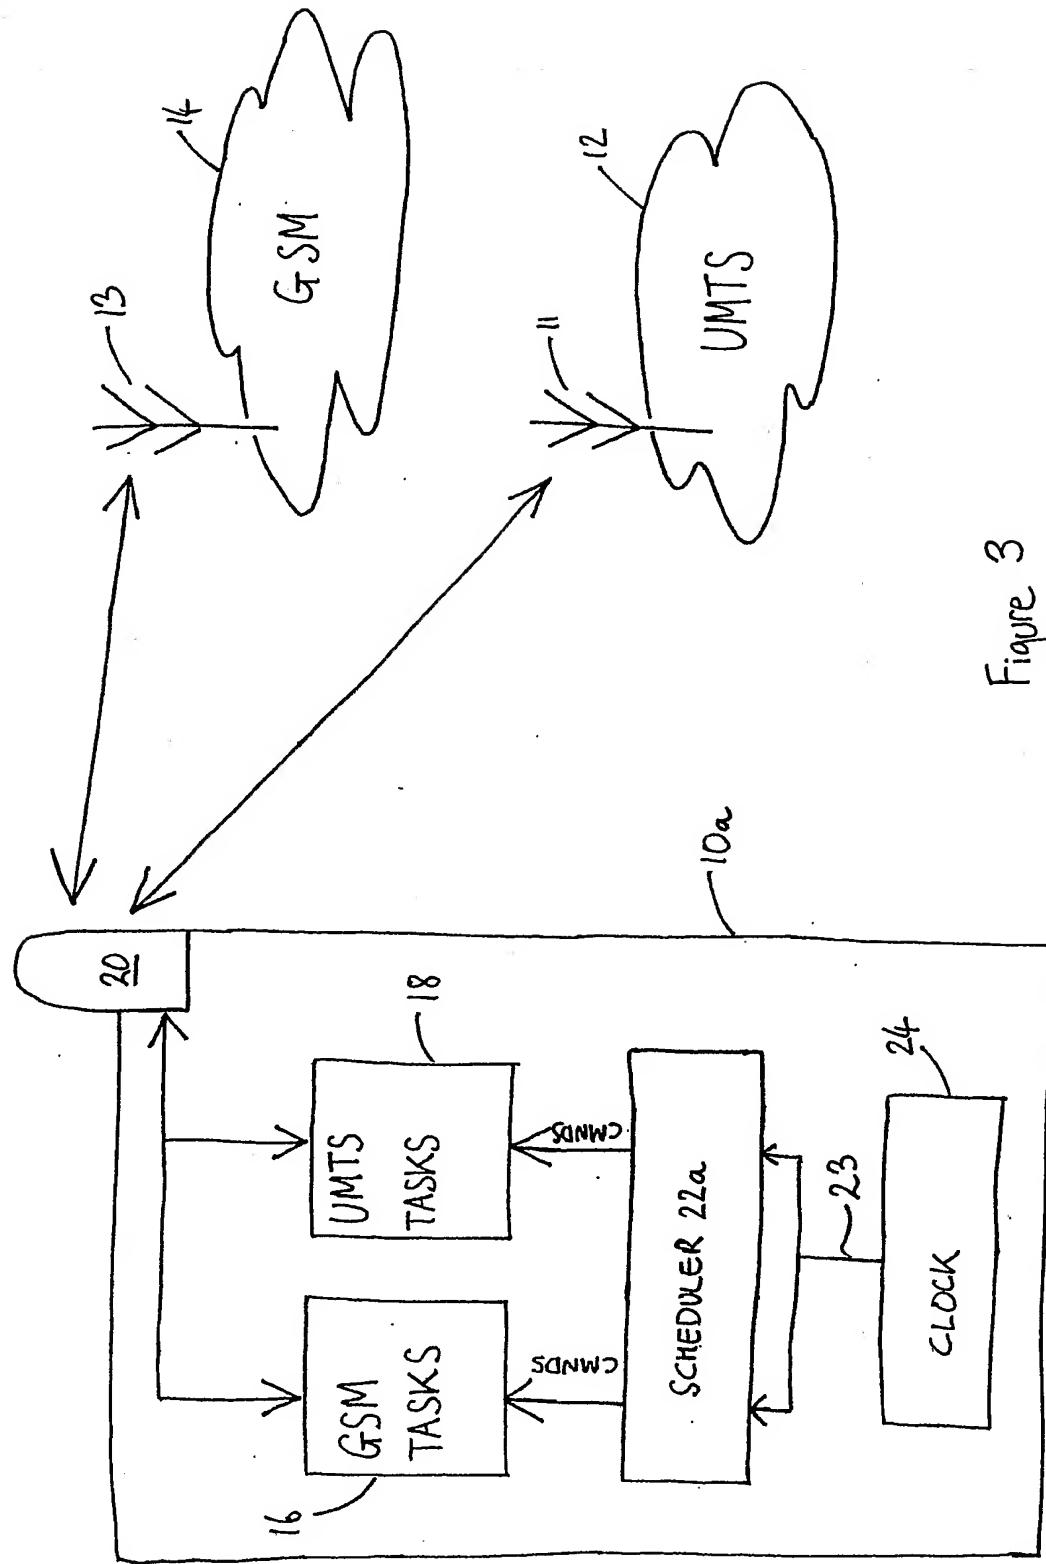


Figure 3

